

**Data Sheet**

Reference No.:40353

**Revolving Transfer Machine**

Brand: PFIFFNER  
 Model: HB 32/16  
 YoM, approx.: 2019 Machining Centre - Rotary / Line  
 Reconditioned: 2019  
 Controls: CNC controls SIEMENS


**basic functions**

number of spindles: 16

**Working Range Turning**

turning diameter (max): 32 mm

**Electrical specifications**

mains voltage: 400 V  
 mains frequency: 50 Hz

**Dimensions / weights**

space requirements -left/right-: 9200 mm  
 space requirements -front/back-: 4002 mm  
 total height: 3200 mm

**Additional Information:**

The plant for sale was completely revised by the manufacturer (2019) and brought up to the state of the art.

The machine could never be used (new condition) due to an order cancellation. Therefore we sell this plant.

Starting material Ø27x3000mm (bar material)

**Stations (16 pcs.):**


1 sawing off with a saw blade Ø250mm  
 2 + 3 feed unit VE 36/100-HSK40; Stroke 100mm, 5430 rpm (IKZ 70bar)  
 4 + 5 feed unit VE 36/100-HSK40; Stroke 100mm, 5430 rpm (IKZ 70bar)  
 6 + 7 CNC compound slide 36/100-HSK40; Stroke X ± 15mm Y ± 30mm  
 8 + 9 CNC turning unit 50/100-PSK; Z-axis 100mm X-axis 20mm (n-max 6'000rpm)  
 10 + 11 CNC turning unit 50/100-PSK; Z-axis 100mm X-axis 20mm (n-max 6'000rpm)  
 12 + 13 feed unit VE 26/80-HSK; Stroke 80mm, 7200 rpm  
 14 VE36 / 100-HSK feed unit; Stroke 100mm 5430 U / min (IKZ)  
 15 + 16 collection unit-rotating, planning, chamfering; CNC compound slide X ± 15mm Y ± 30

**Seller:**


ProdEq Trading GmbH  
 Michael Weishaupt  
 Reckholder 1, 9527 Niederhelfenschwil, Switzerland  
 +41 71 948 70 60  
 michael.weishaupt@prodeq.ch

## Photos & Documents

Reference No.: 40353

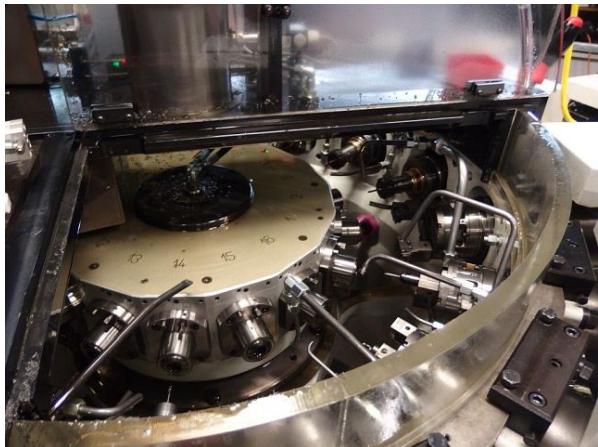

Auslauf

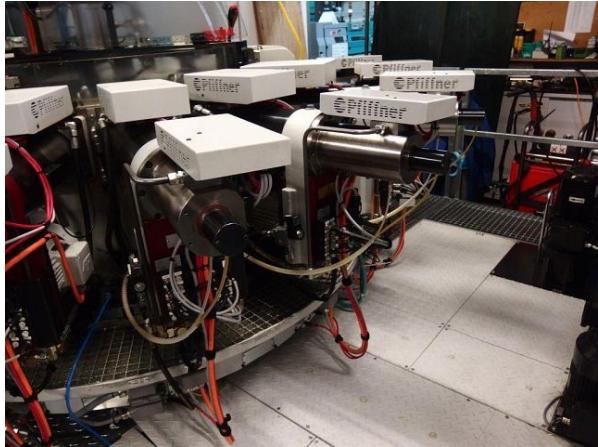

Stangeneinlauf